




**\*\* AVAILABLE \*\***

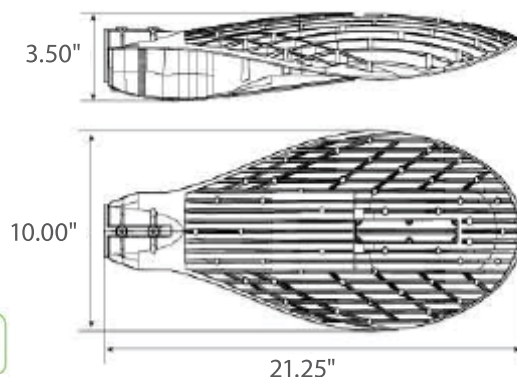

Incredible **75,000 hrs**

### GENERAL DESCRIPTION

Neptun's Street Light fixtures combine architectural form and versatility to make it an excellent choice for new construction or retrofit applications. The LED-81-L1 series fixture is offered in a variety of wattages to provide maximum flexibility in all types of applications. Custom engineered Type III Asymmetrical optics provide excellent uniformity and efficiency. It can replace existing HID & HPS fixtures up to 175W.

### APPLICATION

- Street Lighting
- Pathway Lighting
- Parking Lot Lighting
- Security Lighting
- Storage Area Lighting

### STRUCTURE, MATERIALS, & FEATURES

- Heavy-gauge, die-cast aluminum housing with webbed cooling design.
- Corrosion resistant electrocoat grey finish (custom colors available).
- Slim, state of the art, low profile design for minimum wind load resistance.
- Continuous silicone gasket surrounds lens for IP68 weather tight seal.
- Correlated Color Temperature of (5000°K) for greater visibility and safety.
- 1 COB High Output LED's.
- Driver with built in Neptun Surge Protective Device (NSPD) provides single phase protection for Line/Neutral, Line/Ground, and Neutral/Ground in accordance with IEEE C62.41 C High (10kV & 10kA).
- InstantON flicker-free Cold Start and Hot Re-Start.
- Up to 15 years Maintenance free operation.
- 10 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- **Optional:** 0-10V Dimming, Bi-Level Dimming, Wi-Fi Control, Remote Monitoring and ON/ OFF Control, DC 24V Operation - Solar Compatible

### ORDERING INFORMATION

Sample Number: LED-81040-L1-UNV-0-10VDIM-850-LD-GRY  
Custom options and accessories available. Please consult factory

Series	Wattage	Voltage	Options	Color Temp	Accessories	Color
LED-81 = Street Light	040-L1 = 40 W 050-L1 = 50 W 060-L1 = 60 W 080-L1 = 80 W	UNV = 120-277 VAC 347V = 347 VAC 480V = 480 VAC 24VDC = 24V DC	0-10VDIM = 0-10V Dimming BL-DIM = Bi-Level Dimming * * Includes Motion Sensor ** Contact factory for dimming options	835 = 3500°K 841 = 4100°K 850 = 5000°K * * Standard	LD = Light Sensor/Photocell NEMA Twistlock MD = Motion Sensor ON/OFF LGN = Light Genie Node ** ** Contact factory for product Information	GRY = Grey * Custom Colors Available



lightinnovations@work™



Southern Electronics (Bangalore) Pvt. Ltd.

16-A, Phase 1, Peenya Industrial Area, Bangalore - 560 058, India

Ph: +91 80 39280341/42/45/46/49 Fax: +91 80 39280365

Website: www.seonics.co.in Email:southern@vsnl.com

### PRODUCT INFORMATION

Model No.	Description	Rated Watts	Input Watts	Initial Lumens	Universal Line Voltage (VAC)	Max Line Current (Amp) 120 - 277	THD	Power Factor	Weight
LED-81040-L1-UNV	LED Street Light Fixture	40	42	4,400	120-277	0.34 - 0.15	<20%	>0.90	14 lbs
LED-81050-L1-UNV	LED Street Light Fixture	50	52	5,500	120-277	0.43 - 0.18	<20%	>0.90	14 lbs
LED-81060-L1-UNV	LED Street Light Fixture	60	62	6,600	120-277	0.52 - 0.22	<20%	>0.90	14 lbs
LED-81080-L1-UNV	LED Street Light Fixture	80	83	8,800	120-277	0.70 - 0.30	<20%	>0.90	14 lbs

### SPECIFICATIONS

- Driver ..... Constant Current
- Start Method ..... InstantON
- Hot Re-start ..... InstantON
- Power Supply ..... 350mA
- Driver UL Rating ..... Class 1
- Driver UL Outdoor Rated ..... Wet Location
- Sound Rating ..... Class A
- ANSI Surge Protection ..... IEEE C62.41 C High
- Current Crest Factor ..... 1.5 maximum
- Load Regulation: 5% output current variation across load range
- Line Regulation: 1% output voltage variation across voltage range
- Driver Off-State Draw ..... 0 Watts
- Vibration Compliance ..... 3G
- Universal Input Line Voltage ..... 120-277 VAC
- Input Line Frequency ..... 50/60 Hz
- LED / Driver System Life ..... 75,000 Hrs.
- Lumen Maintenance @50,000Hrs ..... > 70%
- Color Temperature ..... 5,000°K
- Color Rendering Index (CRI) ..... > 80
- Minimum Starting Temperature ..... -40°C
- Maximum Starting Temperature ..... +50°C
- Lumens per Watt ..... > 100
- Shock / Vibration Resistant ..... Yes
- Power Factor ..... > 0.90
- Total Harmonic Distortion ..... < 20%
- Inrush Current Peak ..... < 10 Amp
- FCC Compliance ..... Part 15, Subp. C
- ETL Listed / UL Standard 1598 ..... Yes
- EPA Rating ..... 0.51 ft.<sup>2</sup>
- Housing IP Rating ..... IP65
- Driver IP Rating ..... IP67
- Optics IP Rating ..... IP68
- Warranty ..... 10 Year


### MOUNTING OPTIONS



(2) 5-16"  
Stainless Steel  
Hex-head Bolts

Accepts  
1" - 2" O.D.  
Tenon or Pipe

### PHOTOMETRICS (See Complete IES File)

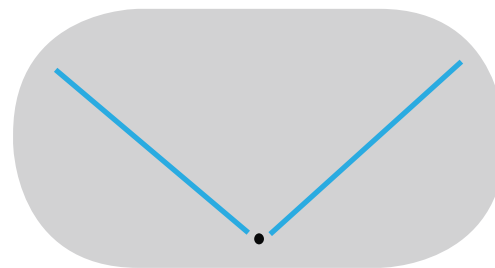

TYPE III ASYMMETRICAL



**Southern Electronics (Bangalore) Pvt. Ltd.**

16-A, Phase 1, Peenya Industrial Area, Bangalore - 560 058, India

Ph: +91 80 39280341/42/45/46/49 Fax: +91 80 39280365

Website: [www.seonics.co.in](http://www.seonics.co.in) Email: [southern@vsnl.com](mailto:southern@vsnl.com)